


# Engage. Motivate. Inspire.

transform through technology with InterWrite™ iPanel.

15" LCD Pen Input Display

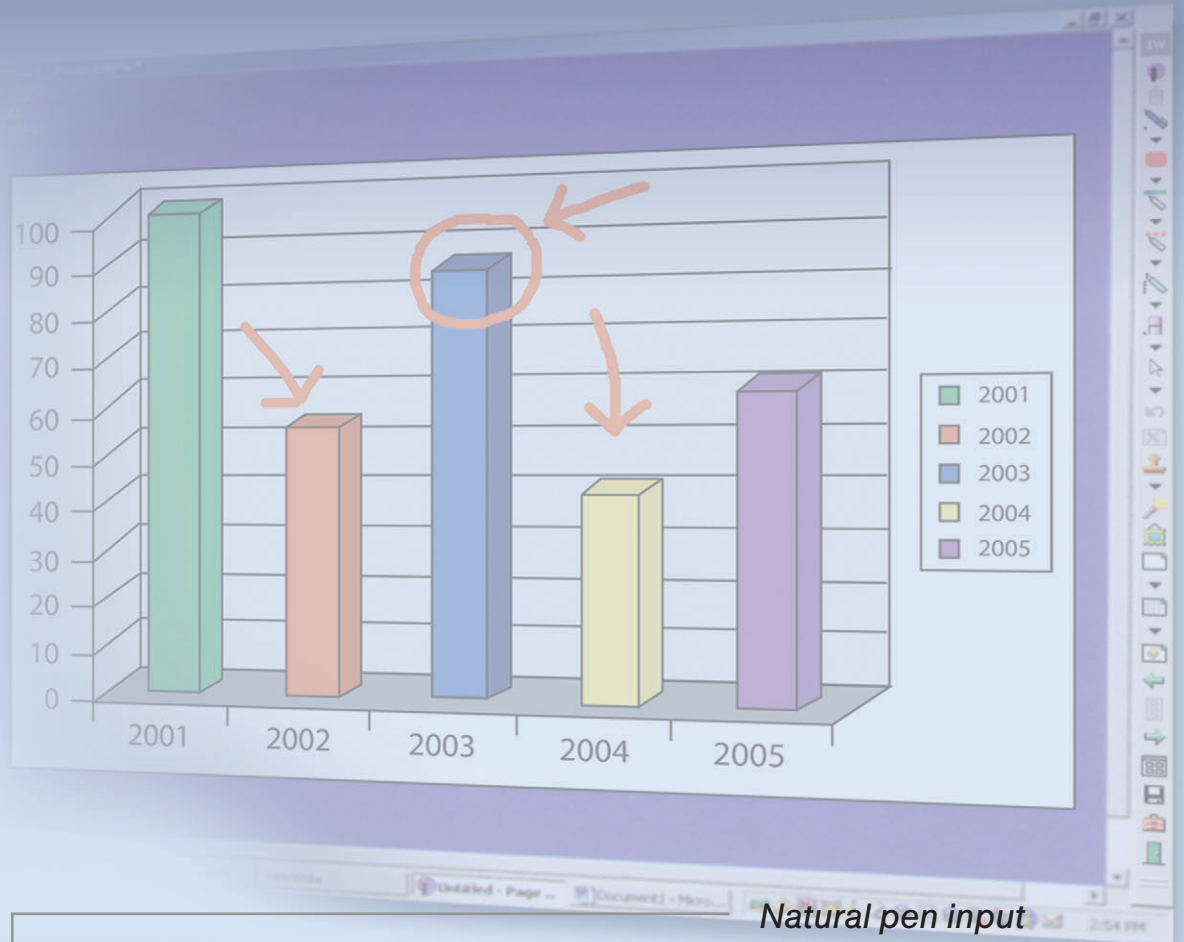

*Natural pen input*

*Annotate key points with InterWrite software*

*Engage your audience*

*Control any application*

*Use on a podium or at your desk*

interwrite™  
**iPanel**

# InterWrite™ iPanel

15" LCD Pen Input Display

**The InterWrite™ iPanel combines the advantages of an LCD monitor with the simplicity of using a pen-input device.** Whether you are a professor teaching a lesson from a podium or an executive delivering a presentation, the iPanel allows you to add annotations and life to your material while constantly facing your audience. The iPanel allows users to work directly on the 15" TFT display using a pen to control and annotate on top of any software application running on a connected computer. By connecting an LCD projector or other display, your audience can see your notes and presentation as you work. Like the rest of the InterWrite Suites of interactive products,



the iPanel includes the powerful yet intuitive InterWrite annotation software. Using the InterWrite Software, presenters or teachers can make annotations directly to the screen, highlight key points, import clipart, use a variety of included background templates, or even convert your hand-written notes to text. All of the notes, images, and annotations can be saved in a variety of formats, printed or e-mailed for action items, absent students or anyone else who may need to see them. The InterWrite iPanel can be used in conjunction with any of the InterWrite products including the InterWrite MeetingBoard, InterWrite SchoolBoard, InterWrite MeetingPad and InterWrite SchoolPad.

## Included with your purchase:

- InterWrite iPanel Display
- 2 iPanel Executive 2-button pens
- USB Cable
- VGA Cable
- Power Supply
- InterWrite Software

## Specifications

Platform Support	Windows 98/2000/ME/XP Mac OS X	Viewing Angle	-60° - 60° H, -60° - 40° V
Screen Size	15"	I/O Connectors	DC power in VGA 15-pin D-sub (IN/OUT) USB Connector
Resolution	1024 x 768 (XGA)	Data Report Rate	125 reports/per second
Active Area	12" x 9" 304mm x 228mm	Dimensions	14.5" x 17" x 2" 370mm x 435mm x 52mm
Response Time	30ms	Weight	10.78 lbs 4.9 kg
Pressure Sensitivity	512 Levels	Operating Temperature	32°F-122°F (0°C-50°C)
Accuracy	+/-0.5mm	Storage Temperature	-4°F-140°F (-20°C-60°C)
Pixel Pitch	0.012" x 0.012" 0.297mm x 0.297mm	Power Supply	AC100-240V Universal
Incline	20° - 80°	Warranty	One year
Number of Colors	16.7 Million		
Contrast Ratio	300:1		
Brightness	200 (cd/m2)		

Corporate Headquarters  
7125 Riverwood Drive  
Columbia, MD 21046  
Toll-Free: 800.344.4723  
Phone: 410.381.6688  
Fax: 410.290.9065

Western Office  
14555 North 82nd Street  
Scottsdale, AZ 85260  
Toll-Free: 800.856.0732  
Phone: 480.948.6540  
Fax: 480.948.5508

European Headquarters  
GTCO CalComp, GmbH  
Kreiller Strasse 24  
81673 Muenchen, Germany  
Phone: + 49 89 3700120  
Fax: + 49 89 37001212

**GTCO CalComp**  
PERIPHERALS  
[www.gtccalcomp.com](http://www.gtccalcomp.com)